

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

02 DEC 2004


(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/104631 A1

- (51) International Patent Classification⁷: **F02D 1/10**, (74) Common Representative: **SIEMENS AKTIENGESELLSCHAFT**; Postfach 22 16 34, 80506 München (DE).
- (21) International Application Number: PCT/EP03/05574
- (22) International Filing Date: 27 May 2003 (27.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02012735.3 7 June 2002 (07.06.2002) EP
- (71) Applicant (for all designated States except US): **SIEMENS AKTIENGESELLSCHAFT** [DE/DE]; Wittelsbacherplatz 2, 80333 München (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LINKE, Tobias** [DE/DE]; Bahnhofstr. 39, 61118 Bad Vilbel (DE). **SAUERSCHELL, Wolfgang** [DE/DE]; Mauerfeldstr. 18, 61440 Oberursel (DE). **WELTEROTH, Peter** [DE/DE]; Siegstr. 123, 53783 Eitorf (DE).
- (81) Designated States (national): JP, US.
- (84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- Declarations under Rule 4.17:**
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations JP, European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)
 - of inventorship (Rule 4.17(iv)) for US only
- Published:**
- with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANGULAR MOTION DRIVING MECHANISM AND GEAR WHEEL FOR USE IN SUCH MECHANISM

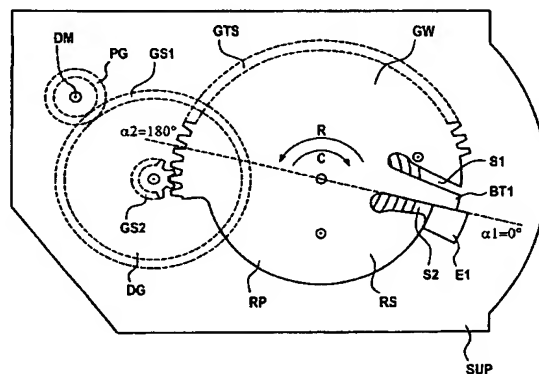

(57) Abstract: Angular motion driving mechanism comprising, mounted on a supporting structure (SUP), a gear wheel (GW) for intermittent rotational movement in clockwise and counter-clockwise directions within an arc bounded by first and second angular positions (α_1 and α_2 , respectively) of the gear wheel (GW) with respect to the supporting structure (SUP), a driving gear (DG) being drivingly coupled to the drive motor (DM) and to the gear wheel (GW) imparting rotational movement to the gear wheel (GW) from said first to said second position (α_1 to α_2 , respectively) in an active mode of the drive motor (DM), a coiled torsion return spring (RS), which is flexed against its bias at rotational movement of the gear wheel (GW) from the first to the second angular position α_1 to α_2 in the active mode of the drive motor (DM), and which relaxes in the non-active mode of the drive motor (DM) by urging the gear wheel (GW) to return from the second to the first angular position (α_2 to α_1 , respectively). To avoid damaging peak collision impact when stopping the gear wheel in its return swing at its first angular position α_1 , the angular motion driving mechanism comprises a flexible end stop being constituted by a member (BT1) structurally fixated to the gear wheel (GW) and in said first position α_1 engaging with an first embossement (E1) of said supporting structure (SUP), said member (BT1) being flexed at contact collision with said first embossement (E1).

WO 03/104631 A1

Description:

Angular motion driving mechanism and gear wheel for use in such mechanism

5

The invention relates to an angular motion driving mechanism comprising a gear wheel mounted on a supporting structure for intermittent rotational movement in clockwise and counter-clockwise directions within an arc bounded by first and second angular positions, α_1 and α_2 , respectively, of the gear wheel with respect to the supporting structure, a drive motor carried by the supporting structure having an active mode and a non-active mode, a driving gear being drivingly coupled to the drive motor and to the gear wheel imparting rotational movement to the gear wheel from said first to said second position, α_1 to α_2 , respectively, in an active mode of the drive motor, a coiled torsion return spring, one end thereof being connected to the gear wheel and the other end thereof to the supporting structure, which is flexed against its bias at rotational movement of the gear wheel from the first to the second angular position, α_1 to α_2 , respectively, in the active mode of the drive motor and relaxes in the non-active mode of the drive motor by urging the gear wheel to return from the second to the first angular position α_2 to α_1 , respectively. The use of such angular motion driving mechanisms is known in various applications such as in automatic doorlock systems and throttle valve drivers. Such mechanisms are generally driven by an electric drive motor, which is alternately switched on and off from the non-active mode into the active mode and vice versa for said intermittent rotational movement of the gear wheel in clockwise and counter-clockwise directions.

In the active mode, the motor outputs rotational movement, which is being transferred through the driving gear to the gear wheel and causes bending stress to accumulate in the increasing flexure of the coiled torsion return spring,

until the gear wheel reaches its second angular position. When the motor is switched off, the coiled torsion spring releases its bending stress by urging the gear wheel to rotate back in the direction of its first angular position.

5 This rotational return movement is stopped by blocking the gear wheel as soon as it reaches its first angular position. To secure full stop blocking, the gear wheel or a member moving along therewith e.g. by fixation to the gear wheel, is generally made to collide with an element of, or fixated to, the supporting structure at the very moment the gear wheel reaches its first angular position. Dependent on the friction and mass enertia of the gear wheel, the driving gear and the drive motor, on the one hand and the flexure energy of the coiled torsion return spring on the other hand, the impact at contact collision of said member with said element may deform or otherwise damage essential parts of said angular motion driving mechanism, giving rise to early wear and/or malfunctioning of the mechanism.

20 Now, the present inventors have recognized the particularly damaging effect of impact energy, released at sudden full stop of the gear wheel in the first position.

25 In consequence, amongst other things, it is an object of the present invention to present an angular motion driving mechanism providing appropriate collision shock absorption at the sudden full stop of the spring driven rotational movement of the gear wheel in its first position, which can be implemented cost effectively.

30 Therefore, an angular motion driving mechanism according to the invention is being characterized by a flexible end stop being constituted by a first member structurally fixated to the gear wheel and in said first position $\alpha 1$ engaging with a first embossement of said supporting structure to block rotational movement of the gear wheel by said coiled torsion

return spring, said first member being flexed at contact collision with said first embossement.

5 The invention provides for a simple implementation of the end stop, whereas the collision energy is being absorbed by the flexibility of the member therewith avoiding damaging peaking collision impact from occurring.

10 The invention also relates to a gear wheel for use in an angular motion driving mechanism as defined hereabove.

15 A gear wheel according to the invention allowing easy and cost effective implementation is characterised by said gear wheel being constituted of flexible material and said first member being an integral part of said gear wheel. This avoids the need for an extra flexible element to provide the function of said first member and allows to choose non-flexible material, such as aluminium, for the supporting structure. Such supporting structure may form part of a
20 housing enclosing the angular motion driving mechanism as a whole.

25 A further simplification in the implementation of such gear wheel according to the invention, while obtaining robustness against breaking or rupture damages is characterised by said first member being constituted by a first blocking tooth integrally formed in the gear wheel by an incision of a first slit, having a width chosen to absorb shocks at said contact collision without exceeding the breaking limit of
30 the first blocking tooth. The width of the first slit is therefore chosen to appropriately limit tangential movement of said first blocking tooth.

35 To increase the flexible length of the first blocking tooth, the first blocking tooth is being integrally formed in the gear wheel by said first slit, and a second slit. Said second

slit is used to obtain an appropriate flexibility of the first blocking tooth.

5 To accommodate rebound swinging movements of the first blocking tooth also at peaking collision impact, while securing appropriate stability of said first blocking tooth, said first and second slits each have a width increasing in radial direction towards the rotation axis of the gear wheel.

10 To prevent tearing at the foot end of the first blocking tooth from occurring, said first and second slits each end into a cavity having a radius being substantially larger than the width of the slits.

15 Another preferred embodiment of a gear wheel according to the invention is characterised by the arc between said first and second angular positions covering a gear tooth segment of substantially 180° being separated from said first blocking tooth by said first slit.

20 Such gear wheel may preferably have a circumferential radius within said arc which is substantially equal to the radial length of the first blocking tooth and larger than the circumferential radius of the remaining part of said gear wheel.

30 According to another aspect of the invention, the use of a gear tooth segment covering an arc wider than 180° being separated from said first blocking tooth by said first slit and defining an arc of equal magnitude between the first and second angular positions (α_1 and α_2) of the gear wheel is made possible by choosing the radial length of the first blocking tooth to be larger than the radius of the gear wheel.

A preferred embodiment of a gear wheel according to the invention providing robust support to the coiled torsion return spring is characterised by an axially cylindrical rim integrally structured with the gear wheel and extending at the rear side thereof being provided with an opening towards the first blocking tooth.

Another preferred embodiment of a gear wheel according to the invention providing appropriate collision shock absorption at the sudden full stop of the spring as well as the motor driven rotational movement of the gear wheel in both first and second angular positions, is characterised by a structure, which is symmetrical with respect to a centre axis, having a second flexible end stop being constituted by a second member, which is located symmetrically to said first member and in said second position α_2 engaging with a second embossement of said supporting structure to block rotational movement of the gear wheel by said drive motor, said second member being flexed at contact collision with said second embossement in the active mode of the drive motor.

Preferably, the radial length of the first blocking tooth differs from the radius of the remaining part of said gear wheel by at least part of the radial length of said first embossement.

These and further aspects and advantages of the invention will be discussed more in detail hereinafter with reference to the disclosure of preferred embodiments, and in particular with reference to the appended Figures that show:

Figure 1, a top view of a preferred embodiment of an angular motion driving mechanism according to the invention;

Figure 2A, a top view of a practical implementation of the

angular motion driving mechanism of Figure 1
without drive gear;

5 Figure 2B, a sectional view of the first blocking tooth of
as part of the gear wheel in the angular motion
driving mechanism of Figure 1;

10 Figure 3, a top view of the practical implementation of the
angular motion driving mechanism of Figure 2A
with complete gearing;

Figure 4, a perspective front view of the gear wheel in the
angular motion driving mechanism of Figure 1;

15 Figure 5, a perspective rear view of the gear wheel in the
angular motion driving mechanism of Figure 1;

20 Figure 6, a front view of the gear wheel for use in an
angular motion driving mechanism according to the
invention in a structure, which is symmetrical
with respect to a centre axis.

Figure 1 shows a preferred embodiment of an angular motion
driving mechanism according to the invention, comprising a
25 gear wheel GW pivotally mounted on a supporting structure
SUP for intermittent rotation in clockwise and counter-
clockwise directions within an arc bounded by first and
second angular positions $\alpha 1$ and $\alpha 2$ of the gear wheel GW with
respect to the supporting structure SUP, as indicated with
30 dotted lines provided with reference numerals $\alpha 1$ and $\alpha 2$. In
this Figure 1, the gear wheel GW is shown in its first
angular position $\alpha 1$. In an active mode, the drive motor DM
drivingly rotates a pinion gear PG pivotally mounted on the
supporting structure SUP, whereas in an non-active mode the
35 drive motor DM releases the pinion gear PG to allow backward
rotation movement. A driving gear DG is drivingly coupled
via the pinion gear PG to the drive motor DM on the one hand

and to the gear wheel GW on the other hand. The driving gear DG has a first set of gear teeth on an upper level or first gear section GS1 and a second set of gear teeth on a lower level or second gear section GS2 mutually fixated and

5 rotating about a common shaft. The first gear section GS1 has a larger radius than the second gear section GS2 and cooperates with the pinion gear PG to receive driving rotational output from the drive motor DM. The second gear

10 section GS2 is in driving engagement with the gear wheel GW, imparting in an active mode of the drive motor DM rotational movement to the gear wheel GW to drive the same from said first position α_1 to said second position α_2 . A coiled

15 torsion return spring RS is being connected to the gear wheel GW at one end and to the supporting structure SUP at the other end thereof. This spring RS is set to flex against its bias at said rotational movement of the gear wheel GW from said first angular position α_1 to said second angular position α_2 , therewith accumulating bending stress until the

20 gear wheel GW reaches said second position α_2 . The drive motor DM, when now being switched off, releases its driving engagement with the pinion gear PG, allowing the gear wheel GW to rotate back from the second angular position α_2 to said first angular position α_1 under bias of the coiled

25 torsion return spring RS. This rotational return movement of the gear wheel GW is stopped as soon as it reaches said first position α_1 again by means of a flexible end stop. This flexible end stop is constituted by a first member, hereinafter also being referred to as first blocking tooth

30 BT1, integrally formed in the gear wheel GW by an incision of first and second slits S1 and S2, respectively, colliding with an first embossement E1 of said supporting structure SUP at said first angular position α_1 of the gear wheel GW. According to the invention, said first blocking tooth BT1 is being made of flexible material suitable to absorb properly

35 shocks also at maximum peak impact collision of the gear wheel GW against the first embossement E1. Dependent on the flexibility of the first blocking tooth material, the first

and second slits S1 and S2, each have a width sufficiently large to accommodate collision caused tangential rebound movements of the first blocking tooth BT1 and sufficiently small to limit tangential movement of said first blocking tooth BT1, such that the first blocking tooth BT1 from breaking or ruptured from the gear wheel GW. The second slit S2 is used to obtain an appropriate flexibly moveable length of the first blocking tooth BT1.

For ease of implementation, the first blocking tooth BT1 forms an integral part of the gear wheel GW, which as a whole is preferably made of suitable flexible material.

To obtain an appropriate compromise between rigidity on the one hand and flexibility on the other hand needed to secure appropriate stability of said first blocking tooth BT1 also at large collision impact, said first and second slits S1 and S2 each have a width increasing in radial direction towards the rotation axis of the gear wheel GW.

Said first and second slits S1 and S2 each end into a cavity having a radius being substantially larger than the width of the slits. This prevents tearing at the foot end of the first blocking tooth BT1 from occurring.

The gear wheel GW as shown is provided with a gear tooth segment GTS covering an arc of substantially 180° being separated from said first blocking tooth BT1 by said first slit S1 and defining an arc of equal magnitude between the first and second angular positions α_1 and α_2 of the gear wheel GW.

The outer circumferential radius of the gear tooth segment GTS is chosen equal to that of the first blocking tooth BT1, and larger than the circumferential radius of the remaining part RP of said gear wheel GW, allowing for a robust and simple construction of a radial contact surface between the

first blocking tooth BT1 and said first embossement E1. The collision forces are directed perpendicular to such contact surface, therewith minimizing deformation of the so obtained end stop means.

5

In a practical embodiment, the diameter and thickness of the gear wheel GW had been chosen in the order of magnitude of 5,5 centimeter and 0,5 centimeter, respectively, the width of said first and second slits S1 and S2, respectively, in the order of magnitude of 0,7 millimeter, whereas said first embossement E1 and said first blocking tooth BT1 have been designed to share a contact surface area with a radial length and tangential thickness in the order of magnitude of 14 and 6 millimeters, respectively.

15

Figure 2A shows a top view of a practical implementation of the angular motion driving mechanism of Figure 1 with the supporting structure SUP including part of the casing or housing of the mechanism, an electric motor as drive motor DM and its pinion gear PG, the gear wheel GW in its first angular position α_1 with the first blocking tooth BT1 pressed against the first embossement E1 under bias of the coiled torsion return spring RS. The drive gear DG has been removed for better view on the gear wheel GW.

25

Figure 2B shows a sectional view of the first blocking tooth BT1 as part of the gear wheel GW in the angular motion driving mechanism of Figure 2A. The width of the first slit S1 at the outer circumference of the gear wheel GW defines the maximum flexure of the first blocking tooth BT1 and as already mentioned above, is chosen sufficiently large to absorb shocks of the first blocking tooth BT1 due to collision with the first embossement E1 and sufficiently small to limit tangential movement of the first blocking tooth BT1 to prevent the same from breaking or tearing off from the gear wheel GW.

30
35

Figure 3 shows a top view of the practical implementation of the angular motion driving mechanism of Figure 2A with complete gearing, i.e. with the driving gear DG of Figure 1 being drivingly coupled to the pinion gear PG of the drive motor DM and to the gear wheel GW imparting rotational movement to the gear wheel GW. Also here the gear wheel is shown in its first angular position α_1 .

Figure 4 shows a perspective front view of a gear wheel GW according to the invention for use in the angular motion driving mechanism of Figures 1, 2A and 3, which is made of a suitable flexible (e.g. synthetic) material;

Figure 5 shows a perspective rear view of the gear wheel GW of Figure 4 at the rear side having an axially extending cylindrical rim RIM integrally structured with the gear wheel GW to obtain an appropriate rigidity thereof and being provided with an opening towards the first blocking tooth BT to avoid reducing flexibility thereof. The RIM also provides structural support to the coiled torsion return spring RS.

Figure 6 shows a gear wheel for use in an angular motion driving mechanism according to the invention in a structure, which is symmetrical with respect to a centre axis CA. This symmetrical gear wheel GW is being provided with a second blocking tooth BT2 formed by incisions of third and fourth slits S3 and S4 in the gear wheel GW, which with respect to said centre axis CA, is symmetrically structured to the first blocking tooth BT1. This second blocking tooth BT2 is to engage with a second embossement E2 (not shown) structured symmetrically to the first embossement E1 of the supporting structure SUP in the second angular position α_2 of the gear wheel GW, providing appropriate collision shock absorption at the collision of said second blocking tooth BT2 with said second embossement E2 in the active mode of the drive motor DM.

In the above, the present invention has been described with reference to a disclosure and drawings that illustrate a preferred embodiment. Persons skilled in the art would however from inspecting thereof recognize various changes and amendments to such preferred embodiment. The invention may well be applied e.g. with a member, which other than the first blocking tooth BT as shown, is constructed by an element separated from the gear wheel GW, but structurally fixated thereto. In such construction, the material of such member may well be different from the material of the gear wheel. Furthermore, the terms clockwise and counterclockwise used above, do not refer to the actual rotational directions of the hands of time clocks and are merely to indicate mutually opposite rotational directions.

15

Therefore, the disclosure herein should be considered by way of example, rather than by way of restriction, and the due scope of the present invention should be determined from the Claims appended hereto.

Claims:

1. Angular motion driving mechanism comprising:

- 5 - a gear wheel (GW) mounted on a supporting structure (SUP) for intermittent rotational movement in clockwise and counter-clockwise directions within an arc bounded by first and second angular positions ($\alpha 1$ and $\alpha 2$, respectively) of the gear wheel (GW) with respect to the supporting structure (SUP);
- 10 - a drive motor (DM) carried by the supporting structure (SUP) having an active mode and a non-active mode;
- 15 - a driving gear (DG) being drivingly coupled to the drive motor (DM) and to the gear wheel (GW) imparting rotational movement to the gear wheel (GW) from said first to said second position ($\alpha 1$ to $\alpha 2$, respectively) in an active mode of the drive motor (DM);
- 20 - a coiled torsion return spring (RS), one end thereof being connected to the gear wheel (GW) and the other end thereof to the supporting structure (SUP), which is flexed against its bias at rotational movement of the gear wheel (GW) from
- 25 the first to the second angular position $\alpha 1$ to $\alpha 2$, respectively, in the active mode of the drive motor (DM) and relaxes in the non-active mode of the drive motor (DM) by urging the gear wheel (GW) to return from the second to the first angular
- 30 position ($\alpha 2$ to $\alpha 1$, respectively), characterized by
- 35 - at least a first flexible end stop being constituted by a first member (BT1) structurally fixated to the gear wheel (GW) and in said first position $\alpha 1$ engaging with a first embossement (E1) of said supporting structure (SUP) to block rotational movement of the gear wheel (GW) by said

coiled torsion return spring (RS), said first member (BT1) being flexed at contact collision with said first embossement (E1).

- 5 2. Gear wheel (GW) for use in an angular motion driving mechanism according to claim 1, characterised by said gear wheel (GW) being constituted of flexible material, said first member (BT1) being an integral part of said gear wheel (GW).
- 10
3. Gear wheel (GW) according to claim 2, characterised by said first member being constituted by said first member being constituted by a first blocking tooth (BT1) integrally formed in the gear wheel (GW) by an
- 15 incision of a first slit (S1), having a width chosen to absorb shocks at said contact collision without exceeding the breaking limit of the first blocking tooth (BT1).
- 20 4. Gear wheel (GW) according to claim 2 or 3, characterised by the first blocking tooth being integrally formed in the gear wheel (GW) by said first slit (S1) and a second slit (S2).
- 25 5. Gear wheel (GW) according to claim 4, characterised by said first and second slits (S1 and S2, respectively), each have a width increasing radially towards the rotation axis of the gear wheel (GW).
- 30 6. Gear wheel (GW) according to claim 5, characterised by said first and second slits (S1 and S2, respectively), each ending into a cavity having a radius being substantially larger than the width of the slits S1 and S2.
- 35
7. Gear wheel (GW) according to one of claims 4 to 6, characterised by a gear tooth segment (GTS) covering an

- arc of substantially 180° being separated from said first blocking tooth (BT1) by said first slit S1 and defining an arc of equal magnitude between the first and second angular positions (α_1 and α_2) of the gear wheel (GW).
- 5
8. Gear wheel (GW) according to claim 7, characterised by the gear wheel (GW) having a circumferential radius within said arc which is substantially equal to the radial length of the first blocking tooth (BT1) and larger than the circumferential radius of the remaining part RP of said gear wheel (GW).
- 10
9. Gear wheel (GW) according to one of claims 4 to 6, characterised by a gear tooth segment (GTS) covering an arc wider than 180° being separated from said first blocking tooth (BT1) by said first slit (S1) and defining an arc of equal magnitude between the first and second angular positions (α_1 and α_2) of the gear wheel (GW), the radial length of the first blocking tooth (BT1) being larger than the radius of the gear wheel (GW).
- 15
- 20
10. Gear wheel (GW) according to claim 8 or 9, characterised by the radial length of the first blocking tooth (BT1) differing from the radius of the remaining part (RP) of said gear wheel (GW) by at least part of the radial length of said first embossement (E1).
- 25
11. Gear wheel (GW) according to claim one of claims 1 to 10, characterised by an axially cylindrical rim (RIM) integrally structured with the gear wheel (GW) and extending at the rear side thereof being provided with an opening towards the first blocking tooth (BT1).
- 30
- 35
12. Gear wheel (GW) according to one of claims 1 to 11, characterised by a structure, which is symmetrical with

respect to a centre axis (CA), having a second flexible
end stop being constituted by a second member (BT2),
which is located symmetrically to said first member
(BT1) and in said second position α_2 engaging with a
5 second embossement (E2) of said supporting structure
(SUP) to block rotational movement of the gear wheel
(GW) by said drive motor (DM), said second member (BT2)
being flexed at contact collision with said second
embossement (E2) in the active mode of the drive motor
10 (DM).

13. Gear wheel (GW) for use in an angular motion driving
mechanism according to one of claims 1 to 12,
characterised by a diameter and thickness of the gear
15 wheel (GW) in the order of magnitude of 5,5 centimeter
and 0,5 centimeter, respectively, a width of said first
and second slits (S1 and S2) in the order of magnitude
of 0,7 millimeter, said first embossement (E1) and said
first blocking tooth (BT1) having a common contact
20 surface area with a radial length and tangential
thickness in the order of magnitude of 14 and 6
millimeters, respectively.

1 / 4

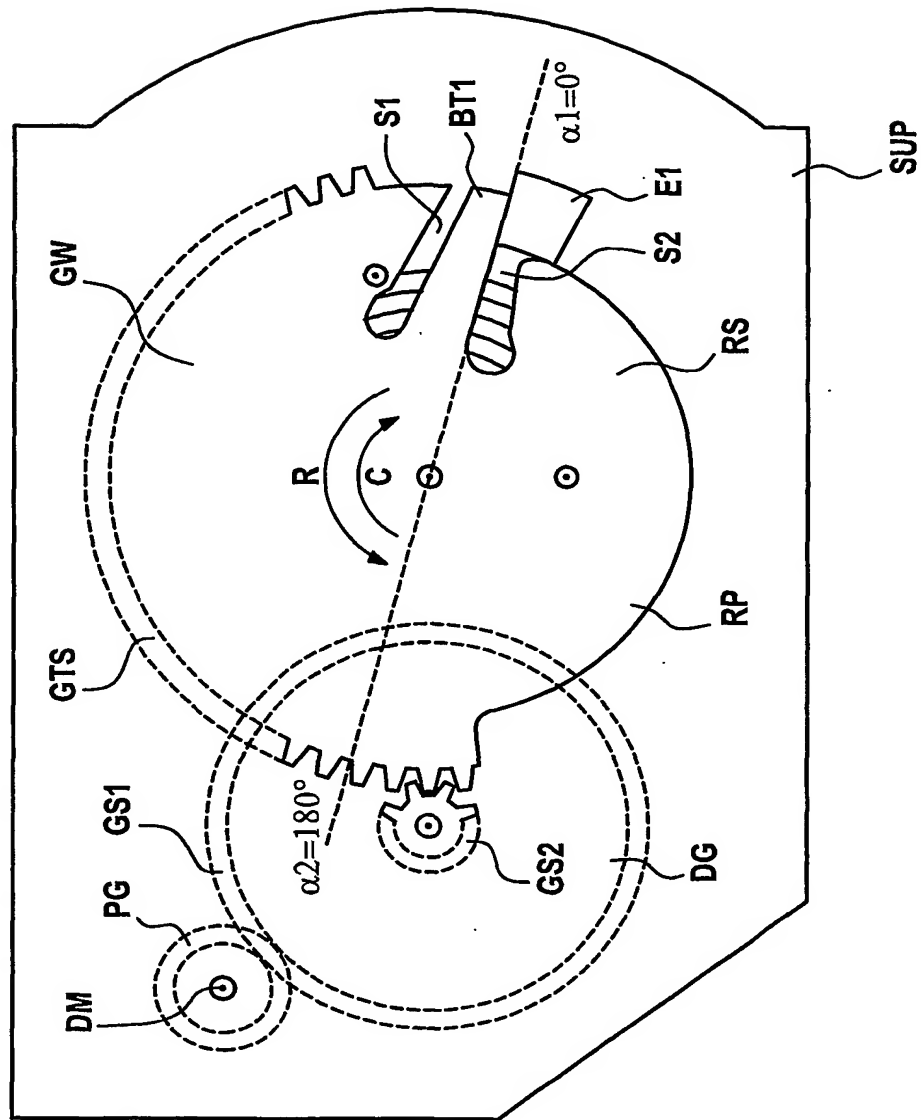


FIG 1

FIG 2A

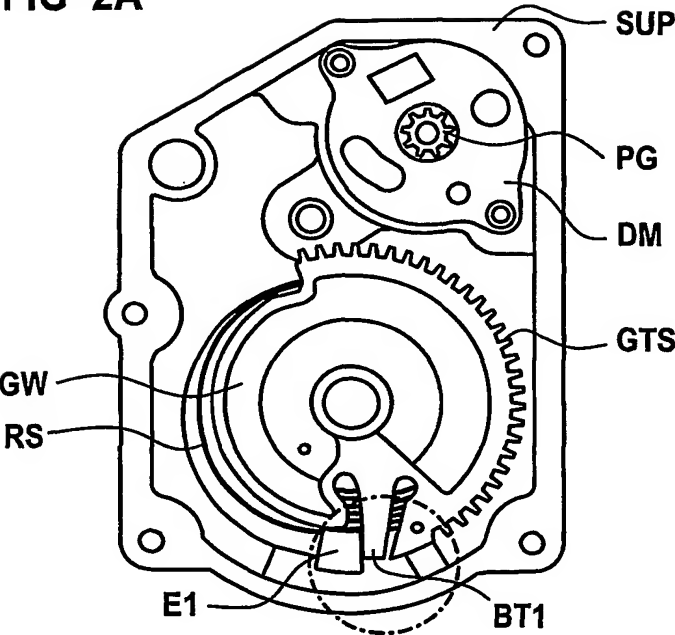


FIG 2B





FIG 3

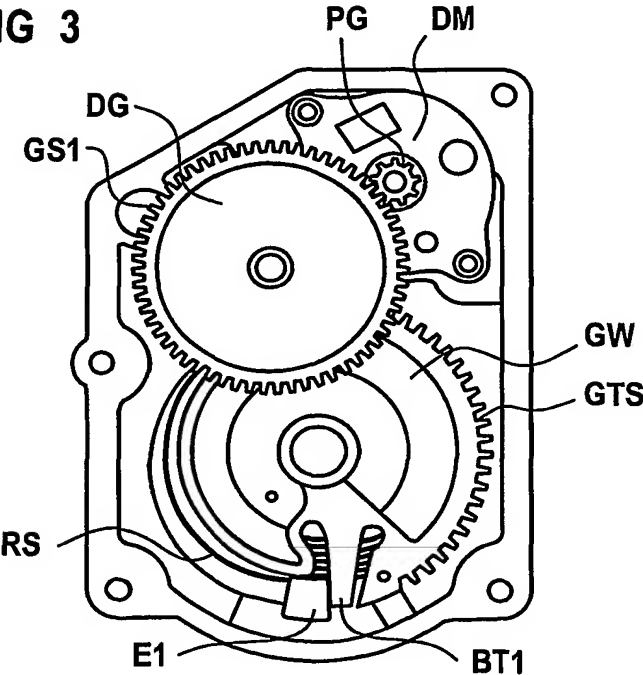

3 / 4

FIG 4


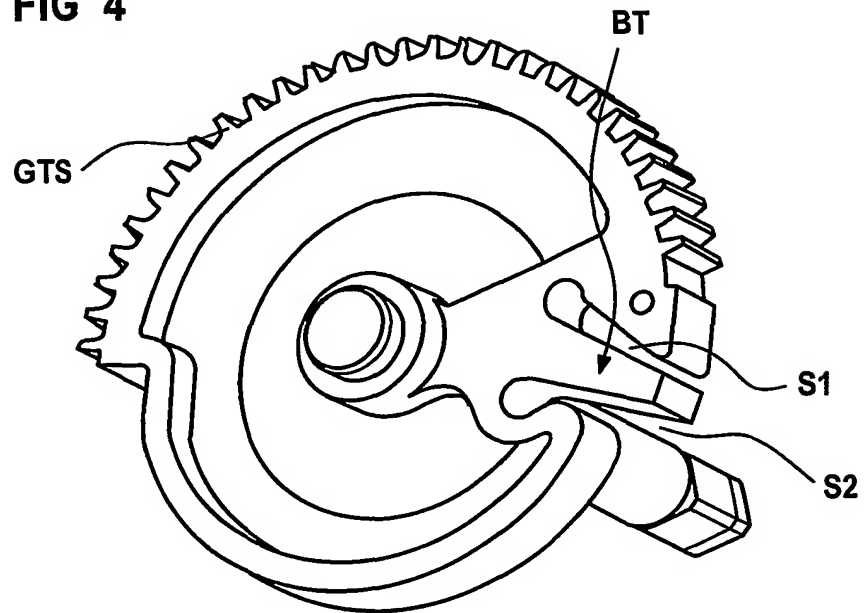


FIG 5

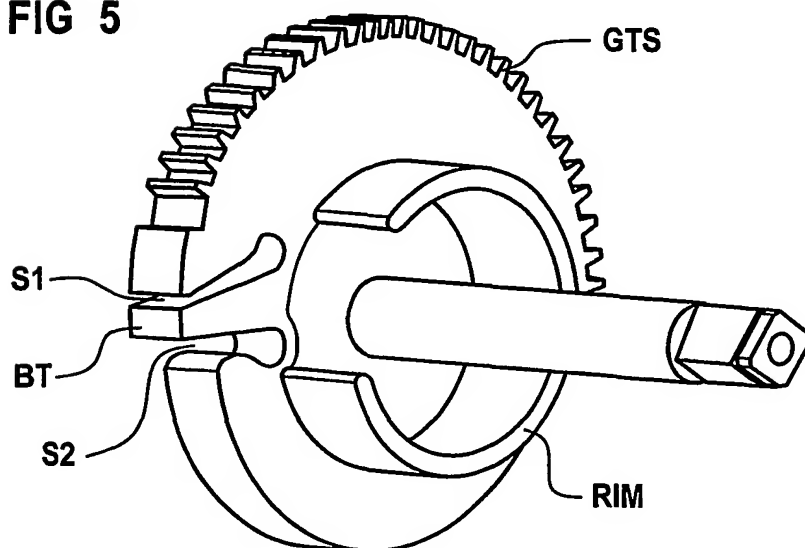

4 / 4

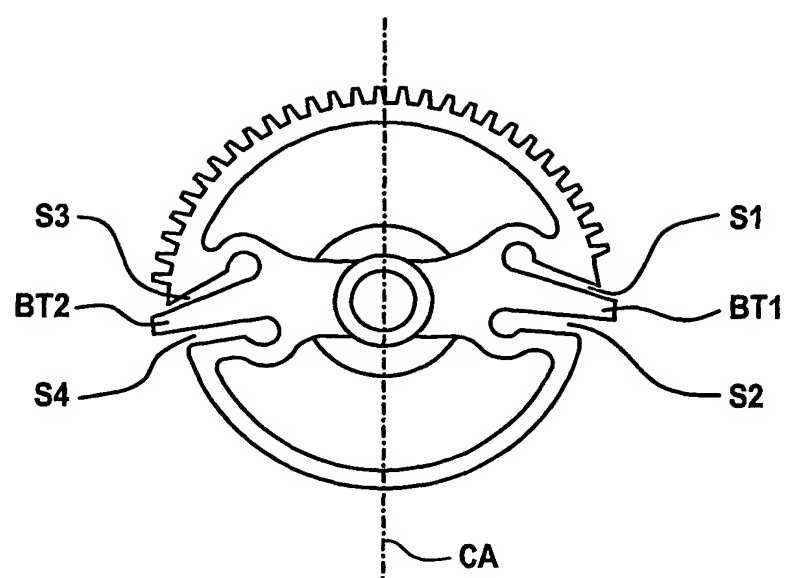


FIG 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/03/05574

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F02D11/10 F16H55/17 F16H27/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F02D F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 024 268 A (FORD MOTOR CO) 2 August 2000 (2000-08-02) paragraphs '0044!-'0050!; figures 4-7 ----	1,2,11, 12
X	EP 1 098 078 A (SIEMENS CANADA LTD) 9 May 2001 (2001-05-09) the whole document ----	1,2
X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 11, 30 September 1999 (1999-09-30) & JP 11 173166 A (AISAN IND CO LTD), 29 June 1999 (1999-06-29) abstract ----	1
A	DE 197 28 480 A (AISAN IND) 15 January 1998 (1998-01-15) column 7, line 51 -column 830; figures 1-9 ----- -/-	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

6 August 2003

Date of mailing of the international search report

09/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vogt-Schilb, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/93/05574

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 775 292 A (SEEGER ARMIN) 7 July 1998 (1998-07-07) the whole document</p>	1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/03/05574

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 1024268	A	02-08-2000	US	6095488 A		01-08-2000
			EP	1024268 A2		02-08-2000
EP 1098078	A	09-05-2001	EP	1098078 A2		09-05-2001
			US	6502542 B1		07-01-2003
JP 11173166	A	29-06-1999	NONE			
DE 19728480	A	15-01-1998	JP	10018864 A		20-01-1998
			DE	19728480 A1		15-01-1998
			JP	10089094 A		07-04-1998
US 5775292	A	07-07-1998	DE	19524941 A1		09-01-1997

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☒ OTHER: hole - punched over texts

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.